


**Model 673-10NS**

## **Nova Scotia D.O.T. Spec One-Way Plow**

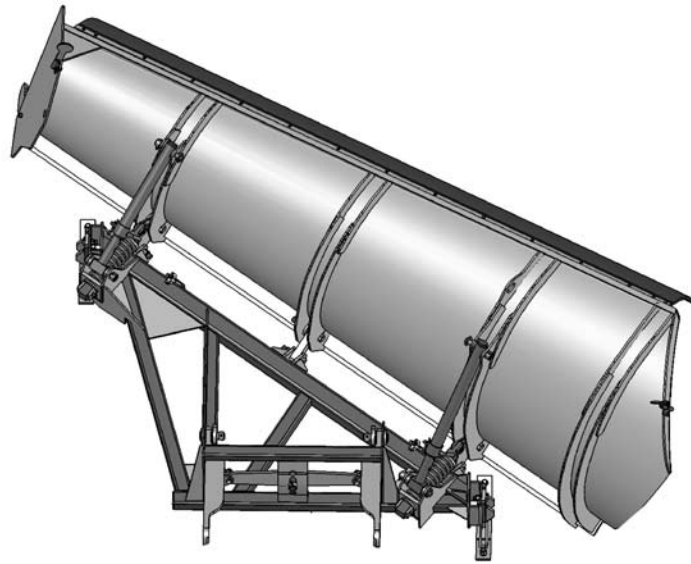

### **Overview**

- 3/16" steel moldboard
- Three adjustable moldboard attach angles
- Accepts a 12 foot, 19 hole cutting blade with 11/16" holes 8" on center
- Replaceable nose knife, 9" long, 2 bolt design.
- 30" to 35" moldboard inlet and 55" to 60" moldboard discharge
- Moldboard upper front edge extends forward 13" to 20" inches beyond the vertical line at the cutting edge in normal operating position
- Moldboard features eight 3-1/2" x 3/8" vertical support ribs
- - 37 degree plowing angle
- - Push frame constructed using 4" x 4" x 1/2" square tubing in the front and 3" x 3" x 3/8" square tubing for main push arms and diagonal braces
- Push frame features 4 connecting points to the moldboard
- 1/2" spring trip mechanism.
- 4" x 4" x 3/4" Cutting edge support angle
- 1" push plate pivots on 2" cold rolled pin allowing the plow to float laterally
- Push plate ears feature 34-1/2" centers
- 1/2" grade 80 lift chain
- 12" 2 ply rubber bolted the full length along the top of the plow
- - Plow is fitted with two NSDOT # DH52N wear shoes with adjustable brackets
- Plow comes assembled with cutting edge, two moldboard shoes, left and right curb shoes and parking stand
- Entire steel structure is andblasted at the factory prior to the application of primer and enamel paint. Black on the back and industrial yellow on the front.
- Replaceable flexible reflectors on both the intake and discharge
- Flag sticker holder located on the intake end of the moldboard (Flag not supplied)
- Welded-on TPW supplied ID numbers

Craig Manufacturing Ltd. warrants to the original purchaser all products manufactured by CRAIG to be free from defects in material and workmanship for a period of (12) months starting from the date of delivery from factory unless otherwise specified.

**CRAIG**  
QUALITY WE STAND BEHIND  
Attachments • Built Right • Fit Right